

Vertical Column INDUCED GAS FLOTATION

Computer simulation has helped NATCO engineers make dramatic improvements in a single-cell vertical induced gas flotation (IGF) system used to clean up oily water that is coproduced with oil and gas. Single cell-vertical column flotation systems represent a major design challenge because of the need to accomplish the same level of separation in a single cell that is achieved in four cells with a conventional horizontal tank design. This type of unit is very difficult to design using conventional physical testing methods because building prototypes is costly, takes a long time to build and it provides very limited information on why the design did or did not work. During the latest design project, NATCO research engineers, led by Dr. Chang-Ming Lee, used computational fluid dynamics (CFD) to simulate the performance of the initial design concepts prior to the prototype stage. Engineers used the latest and most extensive Eulerian multiphase model of FLUENT CFD software to simulate both water and gas bubbles of various sizes within the IGF system. The CFD simulations predicted, and physical testing conducted at NATCO's laboratory in the United Kingdom verified, that bubble distribution patterns from the initial design required considerable improvement. The simulations provided great insight into the characteristics of the fluid flow in the IGF system. These preliminary results were used to modify hardware designs for subsequent physical testing, finally resulting in a



Figure 1. Photo of a VersaFlo unit (capacity of 6,400 m³/day) ready to be shipped to a deep water platform in The Gulf of Mexico.

finished product, now under the trade name of VersaFlo™.

Water is produced along with oil from most wells and typically must be cleaned to a purity of less than 29 parts per million of total oil content prior to disposal. IGF systems work by introducing small gas bubbles from 100 to 500 microns in diameter into the vessel with contaminated water. By controlling the volume and rate of gas and water introduced, the development of the proper bubble sizes for efficient lifting of oil droplets and suspended solids is achieved, explains Dr. Ted Frankiewicz, Vice President, NATCO Process Solutions Group. The hydrophobic oil droplets and oil-coated solids attach to the water-gas interface and float to the surface as the gas bubbles rise. The floating contaminants are then removed by a skimming mechanism.

In the traditional IGF design, oily water enters the unit from one end and passes sequentially through a series of flotation cells. To save weight and space on offshore platforms, the industry is moving towards using a single-cell vertical column configuration. It is much more difficult to obtain the required level of separation in this type of configuration, which typically requires removing 90% of the oil contamination. With a single cell, there is only one chance to remove the oil droplets, and the residence time in a typical unit is limited to four minutes in order to meet volume requirements. It is critical to obtain effective dispersion of the gas bubbles in the vessel so that they contact all of the contaminated water in the vessel.

Problems with existing systems

NATCO engineers were determined to improve the performance of existing vertical column floatation systems, which typically suffer from short-circuiting, re-

sulting in poor separation efficiency. Engineers realized it is a difficult challenge in solving these problems because of the drawbacks of the traditional build-and-test method that is normally used for IGF design. Building and testing prototypes is expensive and time-consuming because they should be constructed to full size in order to avoid scaling discrepancy. Another problem is that the information obtained from testing prototypes is often limited. Engineers are typically able to obtain flow and pressure measurements at only a few spots inside the vessel; therefore, it's very easy to miss problems in other locations that might have a negative impact on the overall performance. As a result, each design iteration typically provides very little information that can be adapted to improve the next one.

Engineers took advantage of using CFD to evaluate the performance of a large number of designs prior to the prototype phase. CFD simulation results provide fluid velocity, pressure, particle trajectories, and other relevant variables throughout the entire solution domain for vessel models with complex geometries and boundary conditions. As part of the analysis, a vessel designer may change the system geometry or the boundary conditions and view the distribution of fluid flow patterns or the effects of other variables. The engineers, led by Dr. Chang-Ming Lee, selected FLUENT CFD software from Fluent Inc., Lebanon, New Hampshire, because they have pioneered the modeling of complex multiphase flows. Fluent Version 6, which was used in this study, is capable of modeling the hydrodynamics of multiphase mixtures with a wide range of bubble sizes and has accurately simulated the distribution of gas bubbles as they move through the bulk liquid phase.

Improving gas bubble injection

The initial models focused on defining the configuration of the eductor, a gas bubble injection device, and the size of gas bubbles it introduced into the IGF

Continued on Page 28

vessel. Eductors are designed to efficiently generate gas bubbles by discharging fluid via a Venturi tube, creating a partial vacuum that draws gas into the eductor. The initial simulation results were surprising to everyone involved in this study because they showed that the distribution of bubbles in the IGF vessel was much poorer than had been expected when using the commercially available eductor. Rather than covering the cross-section of the vessel, as is required to avoid short-circuiting, the bubbles released from each eductor mostly remained within a fairly small cylindrical area, creating a straight, fast-rising plume as they travel up to the top of the vessel. Just as discouraging, the uneven distribution of bubbles across the tank created recirculation zones, which further increased the tendency towards short-circuiting. This helped to explain why the performance of many earlier designs had been disappointing. Because this was the first time that the design team had simulated this type of device, physical tests were performed to validate the CFD model and to verify its accuracy. The following pictures illustrate the comparison between CFD's prediction and laboratory testing.

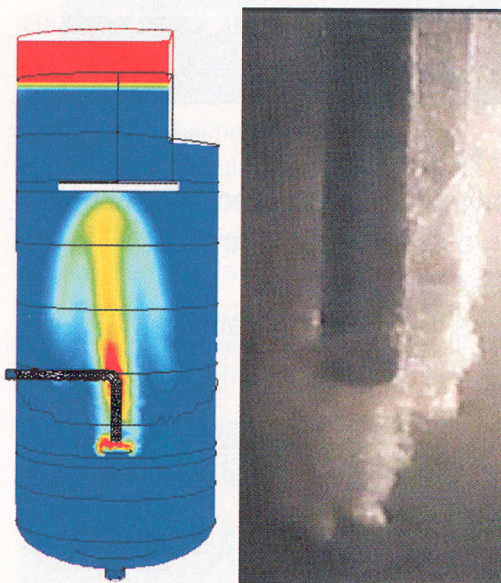


Figure 2. Comparison of CFD simulation and physical laboratory testing.

NATCO engineers then began a series of about forty additional CFD design variations with the goal of improving the separa-

tion efficiency of the IGF design concept. Several simplifying assumptions were made in the model. The 3-D geometry was based on a test vessel located at their laboratory in Gloucester, UK, which is approximately 60 inches in diameter and 12 feet in height. The oily water inlet and air/water mixture inlet were simplified as boundary conditions representing the real positions inside the vessel, hence eliminating the need to model the inlet piping as well. Internal supports and the coalescing packing material were also ignored. Fluent's Eulerian multiphase model with the unsteady segregated solver was used to simulate the mixture flow of air and water. The volume of fluid model with the geometric reconstruction scheme was later used for a separate wave motion suppression study. To improve the spreading of bubbles into a uniform cloud that would contact most of the cross-sectional-area of the IGF, a number of solution variables were altered in the simulations, including the geometry of the oily water inlet

device, the volume of water flowing into the vessel through the eductor, the gas volume fraction in the eductor flow, the size of the gas bubbles, and the internal baffle configurations of the vessel.

Iterating to a better design

In the first stage of the study, engineers performed steady-state single phase test runs involving only oily water flowing downward through the tank in order to be certain that the downward oily water flow stream can be adequately controlled within the desired range. In the next stage, the eductor flow into the IGF vessel was modeled with a high air volume fraction while varying the liquid levels and fluid flow rates. This series of simulations demonstrated flow patterns that matched up well with physi-

cal experiments, helping to provide further confidence in the accuracy of the simulation. The engineers then modeled different configurations of the gas inlet devices while continuing to vary the gas volume fraction. Through this process, design engineers were able to gain considerable understanding of how bubble distribution over the cross-section varies with different inlet design configurations. As a result, they were able to develop a new patent pending eductor design that offers far better performance. The new eductor design features a more radially-directed fluid discharge as opposed to the strictly downward discharge found in conventional designs. The illustration below shows how the new gas inlet configuration promotes uniform bubble distribution across the IGF test vessel.

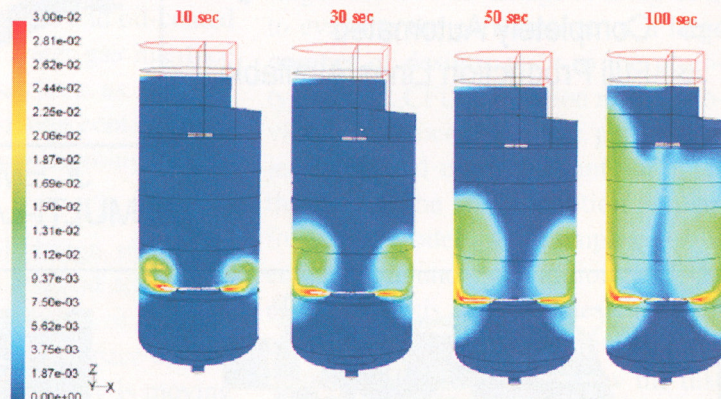


Figure 3. Improved air bubbles distribution provided by a new pat. pend. eductor design.

Subsequently, engineers experimented with different configurations of internal baffles in an effort to obtain additional performance improvements. The internal baffle plate is designed to control the downward flow of the oily water and to prevent the recirculation zones. It was observed that by restricting the area in which the oily water can flow downward, the baffle promotes a more uniform gas bubble distribution. Engineers went one step further by including user-defined functions to simulate the six degrees-of-freedom ocean wave motion induced sloshing effect, and how it will affect the performance of the IGF vessel to be installed on a floating offshore plat-

Continued on Page 29


form. Improved wave motion suppression baffles were later carefully installed in the skimming region inside the offshore version of IGF system. Table 1 lists the actual field performance data from a 10,000 BBL/Day offshore IGF system, currently being marketed under the trade name of VersaFlo™.

Table 1.
Offshore IGF System Field Performance Data

Field Data	Inlet TOC * (mg/L)	Outlet TOC (mg/L)
Test #1	52	27
Test #2	48	19
Test #3	37	13
Test #4	35	13

Note: The sea state was at about 8 - 10 ft.
TOC: Total Oil Content.

The final system configuration, now with US and PCT patents pending, dramatically improves upon existing designs by providing a uniform distribution of gas bubbles across the vessel while effectively eliminating the recirculation zones. These improvements were achieved because the quickness of the CFD simulation made it possible for design engineers to examine far more design variations than would have been possible using the conventional build-and-test method, and also because CFD simulation provided more insight than physical testing could on the performance of each design. CFD is now playing a critical role to NATCO's new product design.

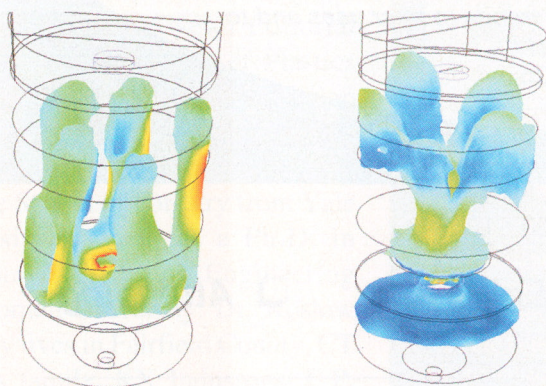

Case without Baffle Installed

Case with Baffle Installed

Figure 4. Internal baffle plate helps eliminate recirculation zones.

For more information about Fluent's CFD software, contact: Fluent Inc., 10 Cavendish Court, Centerra Resource Park, Lebanon, NH 03766. Ph: 603-643-2600, Fax: 603-643-3967.

For more information about NATCO, contact: NATCO Group Inc., 2950 North Loop West, Suite 750, Houston, TX 77092. Phone: (713) 683-9292, Fax: (713) 683-6768.

ISO 9001:2000 Made Easy, Cheap For the Filtration Industry

Finally a firm of ISO professionals have come up with various packages that dispels the myths and confusion that surround the implementation of ISO systems while at the same time saving businesses tens of thousands of dollars on ISO certification. Unlike other ISO companies our goal is to increase your sales overnight (which to us means ISO) so we also have available various marketing packages that guarantee you will increase sales by providing you leads, contracts, sales letters & web sites with top search engine placements to make your ISO system a profitable and quality experience. Our packages have been used by Chevron, TRW and many other fortune 500 companies as well as 2-man mom and pop shops. We have many packages and payment plans to suit every budget.

Our 3 most popular packages are:

1. Starting at only \$1,995 (normally \$3,995) for our complete ISO 9001:2000 software package that contains everything you need to get ISO certified including software that contains policy manual, procedures manual, forms and work instructions with 6 months technical support. **2.** Our most popular package is the ISO 9000 USA.COM PACKAGE which also includes a quality policy manual custom written for your company, which makes you ISO compliant, software containing all procedures, forms and flow charts, personalized training course and 2 years unlimited technical support by the most experienced lead auditors. This package is normally priced at \$6,995 but for the next 7 days it is only priced at \$3,995. Both of these packages have been tried and tested by thousands of companies and are extremely simple and easy to implement with the majority of the work being completed for you and approximately 20% change is only required where you basically fill in the blanks through our step by step instructions. Both packages are

in word format and just typing time alone will save you thousands of dollars. These packages are so effective that over 50% of Global QA customers to date have already had some sort of quality system in place and have purchased the package to help simplify and make more practical their existing quality system. No previous quality experience is required to successfully obtain ISO certification as our manuals are so easy to follow and we give you the most professional technical support.

3. For those companies that are too busy to complete the work themselves we have a complete A to Z turnkey package where we do absolutely everything for you including writing your entire policy and procedures manuals, forms, work instructions, on site training and guarantee you certification all for only \$9,900 for up to 50 employees, (normally priced at \$16,990). For 50 employees plus, call for individual pricing on our complete turnkey package. You will also receive an ISO 9001:2000 certificate from Global QA upon your successful completion and we guarantee you will be certified or your money back. Global QA has been in business for 8 years and we are the number one ISO firm in the USA and we also have payment plans available from only \$665 per month.

Nobody in the USA can match Global QA's price, service, support and we guarantee we will beat any competitor's price and service. We have hundreds of testimonials from satisfied customers in hundreds of industries and we have the best marketing packages in addition to increase your profits and new customers.

Supplies are very limited so call Global QA now to obtain these great end of year discounts.

Global QA 800-500-7190

14001 Environmental Special
(Plus Other Standards Available)

Reply #129. . . For Quick Response: <http://info.filtnews.com>